


HNGRYnsite powered by Liebherr

# Removing instructions for the Lithium-ion battery


Note: These disassembly instructions are only for removing the battery for safe disposal of the HNGRYnsite camera and not for repair. Sensitive components may be destroyed and torn off.

## I. Removing the Li-ion battery

1. Remove the three rubber covers on the bottom of the HNGRYnsite with a pointed object.
2. Unscrew and remove the three screws with a 2.5 mm hex key.

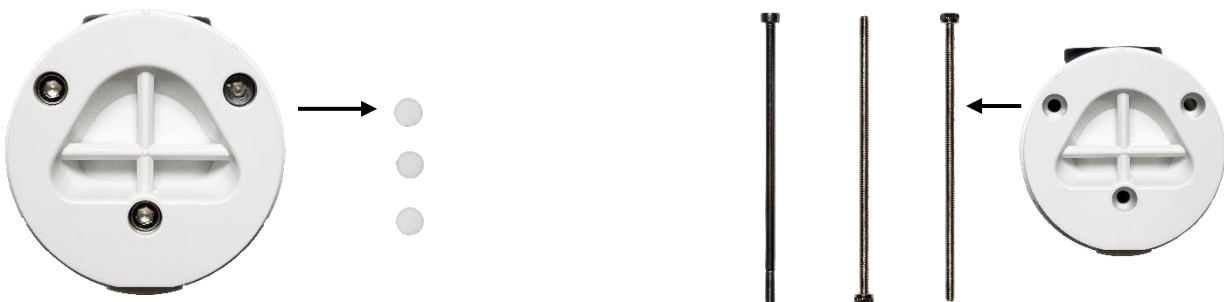


3. Pull the black and white parts of the camera housing apart with a little force.

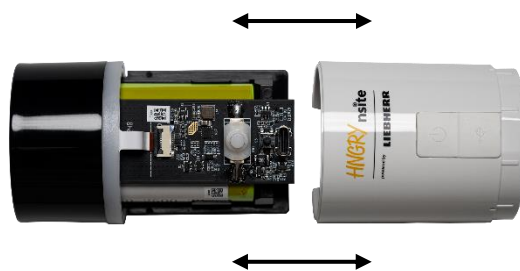


4. Cut or unplug the two ribbon cables then remove the electronics by pulling them out of the black part of the housing.



5. Now separate the two boards that are now visible and plugged into each other.

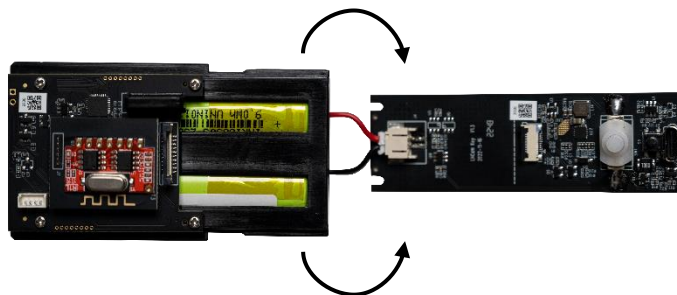

6. Remove the green battery pack from the holder and disconnect it from the circuit board at the white connector.

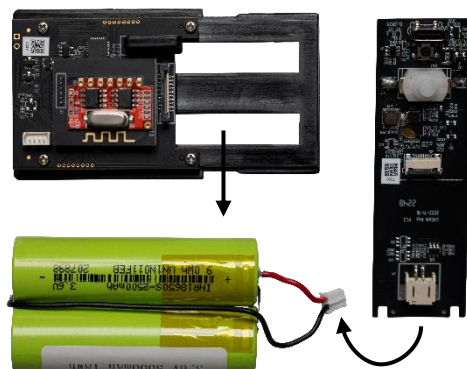

## II. Masking the poles of the Li-ion battery

1. Tape off the poles of the Li-ion battery.

